



Wiring Diagram

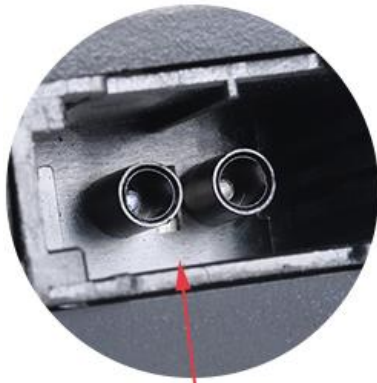

Optic fiber In/Out

ISO Port

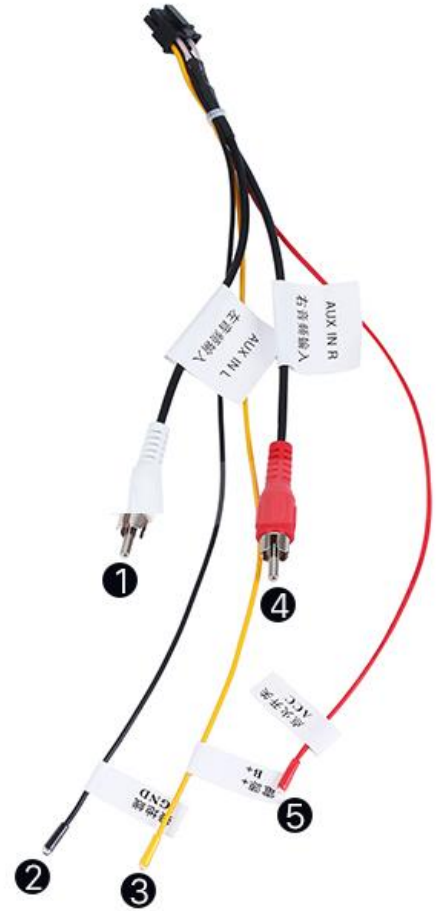

① AUX IN L


② GND

③ B+

④ AUX IN R

⑤ ACC

① MOST BOX power wiring,
please connect the black wire to your
car's GND wire, yellow B+ wire to your
car's B+/BATT wire, red ACC wire to
your original car's ACC wire.

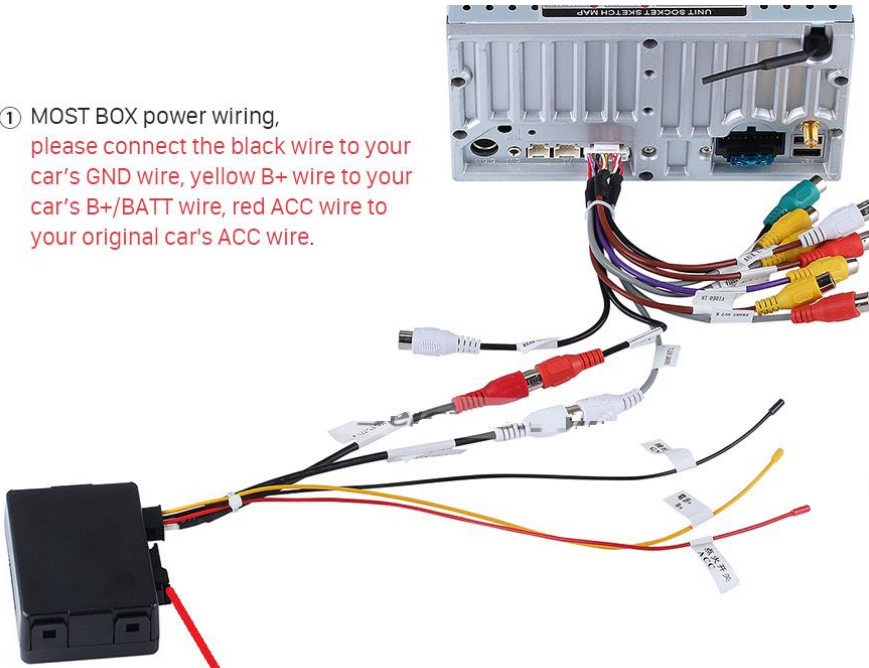

② For the white plug and the red plug on the
decoder, please simply connect them to
our unit RCA cable's FRONT OUT L
and REAR OUT R as in the below picture.
(AUX IN L to your car's FRONT OUT L ,
AUX IN R to your car's REAR OUT R).

