


# Wiring Diagram

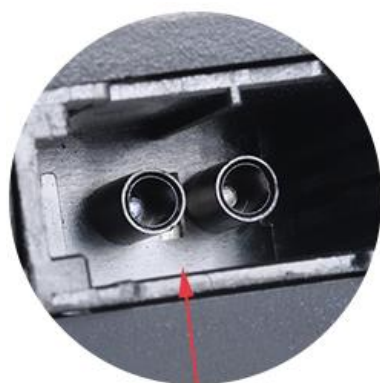

Optic fiber In/Out

ISO Port


① AUX IN L

② GND


③ B+

④ AUX IN R

⑤ ACC

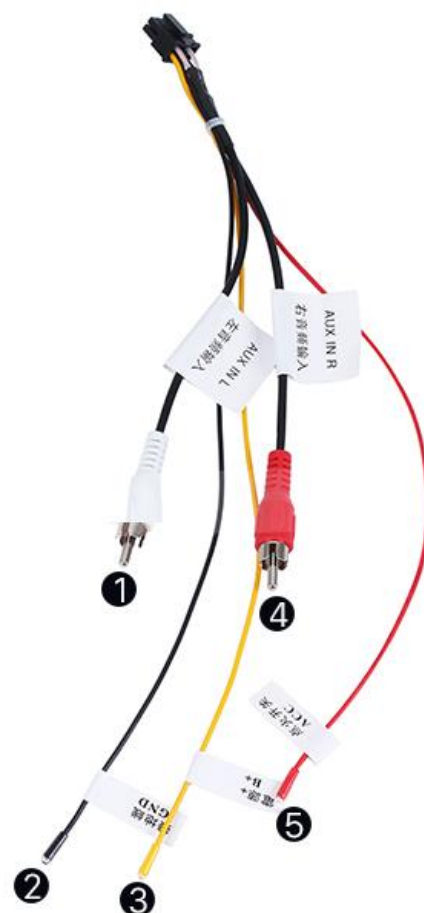

- ① MOST BOX power wiring,  
please connect the black wire to your  
car's GND wire, yellow B+ wire to your  
car's B+/BATT wire, red ACC wire to  
your original car's ACC wire.

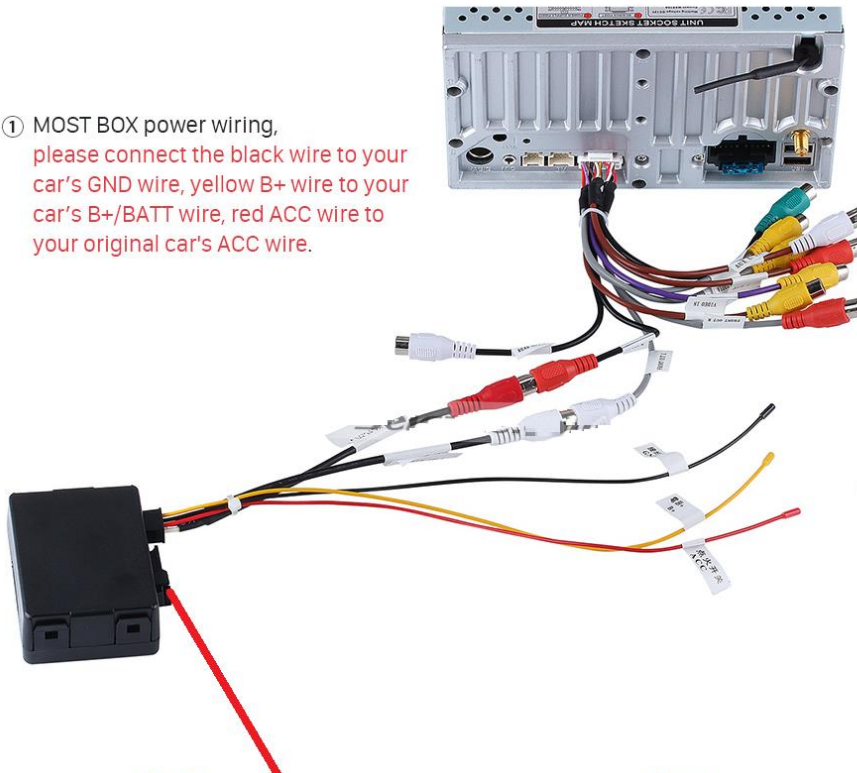

- ② For the white plug and the red plug on the  
decoder, please simply connect them to  
our unit RCA cable's FRONT OUT L  
and REAR OUT R as in the below picture.  
( AUX IN L to your car's FRONT OUT L ,  
AUX IN R to your car's REAR OUT R ).

